




FOR DRIERS WITH SWEAT FITTINGS
ADD "S" TO THE CATALOG NUMBER
(EXAMPLE T-032 S)

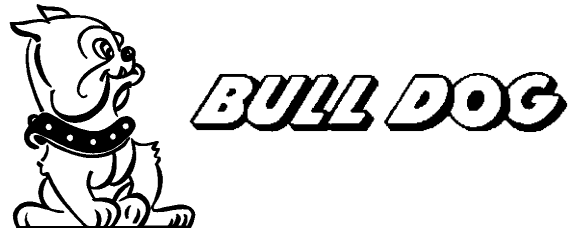

Filter-Driers

In-Depth Filtration

With XH-9 Desiccant— Recommended by
Desiccant Manufacturers for all
Refrigerants and Lubricants

A large cylindrical inlet screen held by a strong spring keeps the desiccant securely in place. The inlet screen is designed to let some dirt particles through and become trapped in the maze of tightly held desiccant and the outlet filter. Therefore, this drier can collect considerably more dirt than one which collects dirt only on a surface.

All of the volume of desiccant in this drier is used efficiently to dry and clean the system since no binder is used. These driers are exceptionally high in acid removal capacity.

CATALOG NUMBER	FLARE FITTINGS	NOMINAL TONS	SHELL O.D.	OVERALL LENGTH	WEIGHT LBS.
T-032	1/4	1/4 - 1	2	4 ⁷ / ₁₆	.8
T-033	3/8	1/4 - 1	2	4 ⁵ / ₈	.8
T-052	1/4	1/3 - 2	2	5	1.0
T-053	3/8	1/3 - 2	2	5 ¹ / ₈	1.0
T-083	3/8	1 - 4	2	5 ⁷ / ₈	1.2
T-084	1/2	1 - 4	2	6 ¹ / ₄	1.21
T-163	3/8	2 - 5	2 ¹ / ₂	6 ¹ / ₂	1.57
T-164	1/2	2 - 5	2 ¹ / ₂	6 ⁷ / ₈	1.58
T-304	1/2	3 - 7 ¹ / ₂	2 ¹ / ₂	9 ⁷ / ₈	2.3
T-305	5/8	3 - 7 ¹ / ₂	2 ¹ / ₂	10	2.31
T-414	1/2	5 - 10	3	10	3.2
T-415	5/8	5 - 10	3	10 ¹ / ₈	3.2

The above driers provide interchangeability with other driers for convenience in service and they are available with pressure taps by special order.



File No. SA 2401 Vol. 1

