

# UNIVERSAL DRIERS

Both Universal Driers shown on this page were designed to fulfill a definite need for the Service Engineer. Both save unnecessary and expensive trips because they provide adaptable sweat connections. Both driers are adequate for systems up through one (1) hp. Especially important, all driers are hermetically sealed to stay fresh indefinitely.

**EXCLUSIVE**

## UNIVERSAL BIG R DRIER FOR SYSTEMS THROUGH 1hp.



Catalog No. 3068

- With XH-9 Desiccant-Recommended by Desiccant Manufacturers for all Refrigerants and Lubricants.
- BUDGET PRICED and made of ONE PIECE OF COPPER.
- STAYS DRY INDEFINITELY -NO PLASTIC CAPS-Hermetically sealed.
- Cut tube for 3/8" or 1/4" diameter-Form capillary sizes with pliers.
- Contains high capacity molecular sieve desiccant. (For systems up to 1 hp)
- BASKET OUTLET provides large area resulting in smaller pressure drop.


PAT. NO. 3,656,625

## DELUXE UNIVERSAL BULL DOG DRIER

Catalog NO. 2933

WITH XH-9 DESICCANT

FOR SYSTEMS THROUGH 1hp.

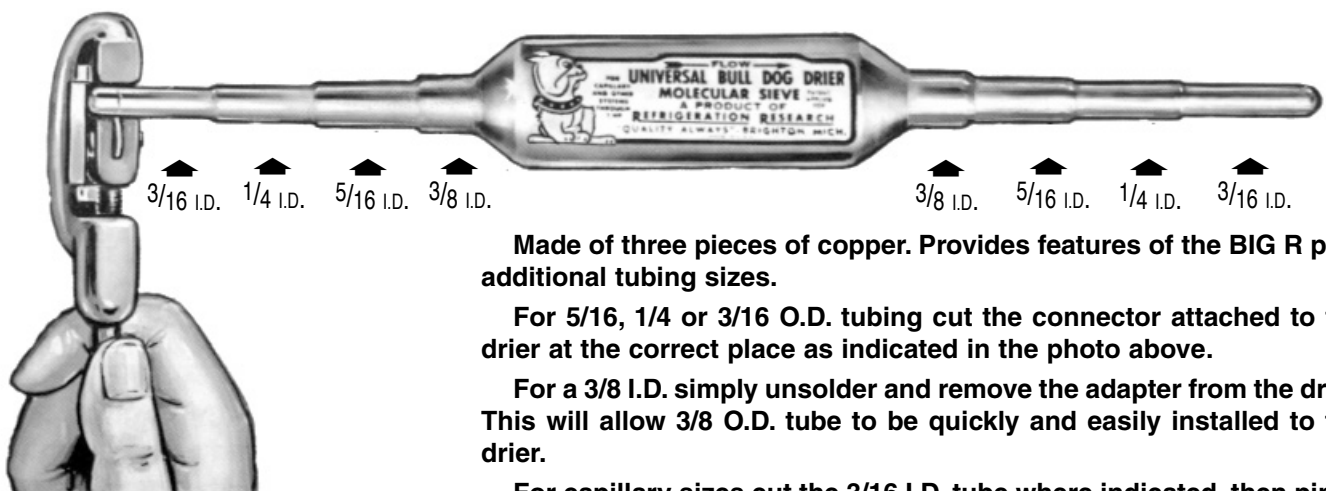

Made of three pieces of copper. Provides features of the BIG R plus additional tubing sizes.

For 5/16, 1/4 or 3/16 O.D. tubing cut the connector attached to the drier at the correct place as indicated in the photo above.

For a 3/8 I.D. simply unsolder and remove the adapter from the drier. This will allow 3/8 O.D. tube to be quickly and easily installed to the drier.

For capillary sizes cut the 3/16 I.D. tube where indicated, then pinch tube down to fit the particular size of capillary.

For systems up through 1 H.P. Drier is 1" O.D. and has overall length of 9 inches.

PATENTED

27

